

SMD LVPECL Crystal Oscillator



Size: 3.2×2.5×0.95 mm

3J Series SMD LVPECL Crystal Oscillators

Features

- Differential output (LV-PECL)
- Frequency range from 10MHz to 250MHz
- 2.5V /3.3V operation voltage
- Excellent low phase noise and jitter
- 3-state function available
- Automatic mounting and reflow soldering
- Applications: Fibre channel, Ethernet, Server SONET, ATA, SCSI devices, etc
- RoHS Compliant /Pb Free




Standard Specification

Item /Type	3J (SMD 3225 LVPECL Crystal Oscillators)
Output Type	LVPECL
Output Load	50Ω to Vcc-2V
Supply Voltage	2.5V /3.3V
Frequency Range	10~250 MHz
Supply Current	80mA Max.
Overall Frequency Stability*	±50ppm, or specify
Operating Temperature	-40~+85°C, or specify
Storage Temperature	-55~+125°C
Voltage Vol (Max.) /Voh (Min.)	Vcc-1.62V /Vcc-1.025V
Rise (Tr) /Fall (Tf) Time	1ns Max.
Start-up Time	3ms Max.
Duty Cycle	45~55%
Phase Noise (156.25MHz) at 1KHz	-125dBc/Hz
Phase Jitter (12KHz~20MHz)	1ps Max.
Aging (at 25°C)	±3ppm /Year Max.
Packing Units	3000pcs. /Reel

* Inclusive of frequency tolerance at 25°C, variation over temperature, supply voltage variation, aging and vibration.

Dimensions [mm]

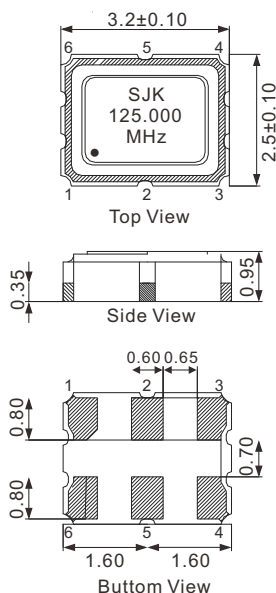

Pin Connections

Pin No.	Connection
1	OE or NC
2	OE or NC
3	GND
4	Output
5	Comp. Output
6	Vcc

