


# TCXO (Temperature Compensated Crystal Oscillator) **SJK**

Size: 3.2×2.5×0.90 mm

8W Series SMD 3225 TCXO /VC-TCXO

## Features

- Output frequency: 10~52MHz
- 3225 size, 0.90mm high SMD TCXO/VC-TCXO
- Low voltage operation and low phase noise
- Temperature stability:  $\pm 0.5\text{ppm} \sim \pm 2.0\text{ppm}$
- VC-TCXO available
- Automatic mounting and reflow soldering
- Applications: Phone, GPS, WiMAX, WLAN, IoT, Wearable electronics, etc.
- RoHS Compliant /Pb Free

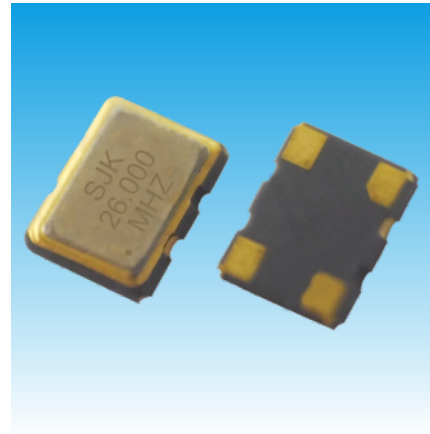


## Standard Specification

Item /Type		8W (SMD 3225 TCXO /VC-TCXO)
Output Type		Clipped Sinewave
Output Load		10K $\Omega$ //10pF
Supply Voltage		1.8~3.3V
Frequency Range		10~52 MHz
Supply Current		2.0mA Max.
Output Level		0.8 Vp-p Min.
Frequency Stability	Tolerance	$\pm 2.0\text{ppm}$ Max. (after 2 reflows)
	vs Temperature	$\pm 2.5\text{ppm}$ Max.
	vs Supply Voltage	$\pm 0.2\text{ppm}$ Max. ( $V_{cc} \pm 5\%$ )
	vs Load	$\pm 0.2\text{ppm}$ Max. (Load Varies $\pm 10\%$ )
	vs Aging	$\pm 1.0\text{ppm}$ Max. /Year
Auto Frequency Control (AFC) Range*		$\pm 7 \sim \pm 16\text{ppm}$ ( $1.4 \pm 1V$ )
Start-up Time		2ms Max.
Operating Temperature		-30~+85°C
Phase Noise @19.2MHz	100Hz	-115dBc/Hz
	1KHz	-135dBc/Hz
	10KHz	-148dBc/Hz
Packing Unit		3000pcs./Reel

\*AFC Range is selective and disable is acceptable.

## Dimensions [mm]

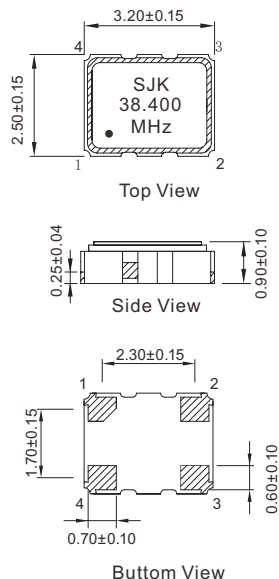

## Pin Connections

Pin No.	Connection
1	Vcon(VC-TCXO)/GND(TCXO) Enable /Disable (Stand-by function)
2	GND
3	Output
4	Vcc

