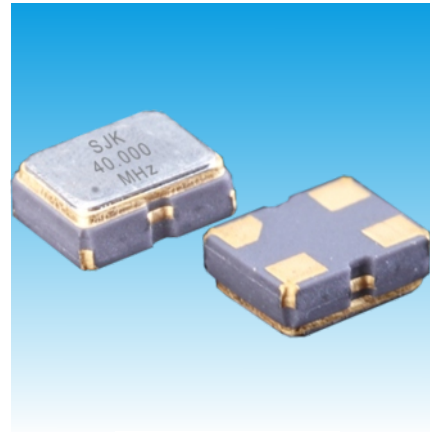





Features

- 2520 size, low profile of 0.8mm
- Frequency range from 4MHz to 75MHz
- Low voltage operation
- Low current consumption
- 3-state function
- Automatic mounting and reflow soldering
- Applications: *WLAN, GPS, Bluetooth, Smartphone, DVC, etc.*
- RoHS Compliant & Pb Free


Standard Specifications

Type	2N SMD Crystal Oscillator
Output Type	CMOS
Output Load	15pF, or specify
Oscillator Mode	Fundamental
Supply Voltage	1.8~3.3V
Frequency Range	4~75 MHz
Frequency Stability	±20ppm, ±30ppm, or specify
Operating Temperature	-40~+85°C, or specify
Storage Temperature	-55~+125°C
Voltage Vol (Max.) /Voh (Min.)	0.1VDD / 0.9 VDD
Rise (Tr) /Fall (Tf) Time	5ns Max.
Supply Current	5mA Max.
Symmetry	45~55%
Start-up Time	5ms Max.
Phase Jitter (12KHz~20MHz)	1ps Max.
Aging (at 25°C)	±3ppm /Year Max.
Packing Units	3000pcs. /Reel

Dimensions [mm]

Pin Connections

Pin No.	Connection
1	OE (Output Enable)
2	GND
3	Output
4	Vcc

