


Features

- 1-Port Resonator
- Ceramic Package for Surface Mounted Technology (SMT)
- Package Size 5.0x5.0x1.5 mm
- RoHS Compatible
- Package Code QCC8C
- Electrostatic Sensitive Device (ESD)

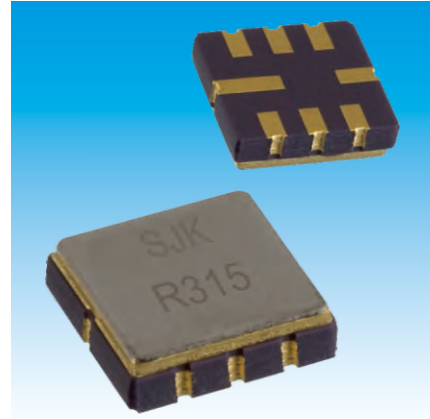


Standard Specifications


P/N	Center Frequency (MHz)	Frequency Tolerance (kHz)	Insertion Loss (dB)	Package Code
R299	299	±30 /±75	1.2	QCC8C
R303.825	303.825	±30 /±75	1.5	QCC8C
R303.875	303.875	±30 /±75	1.4	QCC8C
R304.3	304.3	±30 /±75	1.1	QCC8C
R315	315	±30 /±75	1.3	QCC8C
R330	330	±30 /±75	1.6	QCC8C
R358	358	±30 /±75	1.0	QCC8C
R370	370	±30 /±75	1.4	QCC8C
R390	390	±30 /±75	1.4	QCC8C
R403.22	403.22	±30 /±75	1.5	QCC8C
R403.55	403.55	±30 /±75	1.3	QCC8C
R433	433.92	±30 /±75	1.2	QCC8C
R434.42	434.42	±30 /±75	1.3	QCC8C
R868.35	868.35	±75 /±150	1.0	QCC8C

For other frequencies and specifications, please contact our sales department.


Dimensions [mm]



Top View

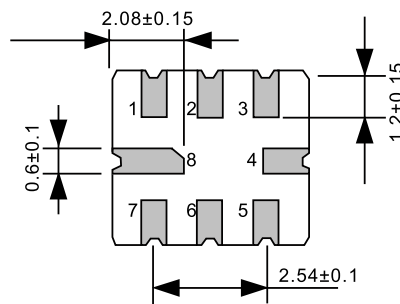

Bottom View



Side View

Pin Function

Pin No.	Function
2	Input/Output
6	Output/Input
1 / 3 / 5 / 7	To be Grounded
4 / 8	Case Ground